



PRODUCT SPECIFICATIONS

**CONVERGENT
CONNECTIVITY
TECHNOLOGY**

CAT6ASP4

Description:	23AWG Plenum four twisted pairs, shielded, Category 6A Horizontal Cable Tested to 500 MHz
Standards:	ANSI/TIA/EIA 568C.2 Category 6A, 11801:2002 Category 6A
Ratings/Approvals:	NEC Article 800, UL 444 Type CMP Rating FT6, C(ETL)US, RoHs Compliant
Applications:	Supports all category 6A applications including Ethernet 10 Gigabit, 100BASETX, 10GBASE-T, 100BaseVG ANYLAN, 155ATM, 622ATM, NTSC/PAL Component or Composite Video, AES/EBU Digital Audio, AES51, RS-422.

CONSTRUCTION

Conductor:	23 AWG Solid Bare Copper
Number of Conductors or Pairs:	4 Pair
Construction:	4 Pairs cabled around a pair separator (spline)
Tape:	Clear Mylar Tape
Drain:	Solid Tin Copper
Shield:	Aluminum/Polyester Tape (100% Coverage)
Jacket Material:	Flame Retardant Polyvinyl Chloride
Nominal Overall Cable Diameter:	0.290 in. (7.747 mm)
Approximate Cable Weight:	49 lb/1,000 ft.
Surface Print:	<i>DATAMEG-10G[®] XXXXXXXX* CAT6A (AUGMENTED) 10GIG 4STP 23AWG C(ETL)US CMP FT6 + Sequential Footage Marking</i>

ELECTRICAL & PHYSICAL PROPERTIES

Temperature Rating:	Installation: 0°C to 50°C Operation: -2°C to 60°C
Velocity of Propagation:	72%
Mutual Capacitance:	14 pF/ft Nominal
Capacitance Unbalance:	330 pF/ft maximum
Maximum Conductor D.C.R.:	28.6Ω/1,000 ft
Maximum D.C.R. Unbalance:	5%
Maximum Delay Skew:	45 ns/100m
Characteristic Impedance:	From 0.772 MHz - 100 MHz 100 ± 15% From 101 MHz - 250 MHz 100 ± 22% From 251 MHz - 500 MHz 100 ± 32%
Insulation Colors:	Blue paired with White/Blue Orange paired with White/Orange Green paired with White/Green Brown paired with White/Brown

*XXXXXXXX Represents ETL Control Number

Issue Date: March '15 Revision: 4

THE STRONGEST LINK IN YOUR SUPPLY CHAIN



PHONE: 866-905-6744
FAX: 845-651-3564

Page 1 of 3

PO BOX 454
FLORIDA, NY 10921

techsupport@cctcable.com




PRODUCT SPECIFICATIONS

**CONVERGENT
CONNECTIVITY
TECHNOLOGY**

CAT6ASP4

ELECTRICAL CHARACTERISTICS

Frequency MHz	Return Loss	Insertion Loss	NEXT	PS-NEXT	ACRF	PS-ACRF	Prop. Delay	Alien Crosstalk	
	(dB/100m) Minimum	(dB/100m) Maximum	(dB/100m) Minimum	(dB/100m) Minimum	(dB/100m) Minimum	(dB/100m) Minimum	(dB/100m) Maximum	PS ANEXT (dB/100m) Minimum	PS AACRF (dB/100m) Minimum
1	20.0	2.0	74.3	72.3	67.8	64.8	570.0	67.0	67.0
4	23.0	3.8	65.3	63.3	52.8	52.8	552.0	67.0	66.2
8	24.5	5.3	60.8	58.8	46.7	46.7	546.7	67.0	60.1
10	25.0	5.9	59.3	57.3	44.8	44.8	545.4	67.0	58.2
16	25.0	7.4	56.2	54.2	40.7	40.7	543.0	67.0	54.1
20	25.0	8.3	54.8	52.8	38.8	38.8	542.0	67.0	52.2
25	24.3	9.3	53.3	51.3	36.8	36.8	541.2	67.0	50.2
31.25	23.6	10.5	51.9	49.9	34.9	34.9	540.4	67.0	48.3
62.5	21.5	14.9	57.4	45.4	28.9	28.9	538.6	65.6	42.3
100	20.1	19.1	44.3	42.3	24.8	24.8	537.6	62.5	38.2
155	18.8	24.0	41.4	39.4	21.0	21.0	536.9	59.6	34.4
200	18.0	27.5	39.8	37.8	18.8	18.8	536.5	58.0	32.2
250	17.3	31.0	38.3	36.3	16.8	16.8	536.3	56.5	30.2
300	16.8	34.2	37.1	35.1	15.3	15.3	536.1	55.3	28.7
350	16.3	37.2	36.1	34.1	13.9	13.9	535.9	54.3	27.3
400	15.9	40.0	35.3	33.3	12.8	12.8	535.8	53.5	26.2
500	15.2	45.2	33.8	31.8	10.8	10.8	535.6	52.0	24.2

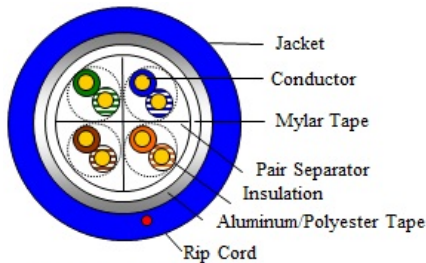

*Drawing Not To Scale

Issue Date: March '16 Revision: 4

THE STRONGEST LINK IN YOUR SUPPLY CHAIN



PHONE: 866-905-6744
FAX: 845-651-3564

Page 2 of 3

PO BOX 454
FLORIDA, NY 10921

techsupport@cctcable.com



PRODUCT SPECIFICATIONS

**CONVERGENT
CONNECTIVITY
TECHNOLOGY**

CAT6ASP4

Note: While Convergent Connectivity Technology has made every reasonable effort to ensure the accuracy of the information in this document, Convergent Connectivity Technology does not guarantee that it is error-free, nor does Convergent Connectivity Technology make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Convergent Connectivity Technology reserves the right to make any adjustments to the information contained herein at any time without notice. Convergent Connectivity Technology expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

Your signature constitutes that you have read and agreed to this specification sheet and upon confirmation of your order; this item may be non-cancelable and non-returnable.

Signature: _____

Company: _____

Date: _____

Issue Date: March '16 Revision: 4

THE STRONGEST LINK IN YOUR SUPPLY CHAIN



PHONE: 866-905-6744
FAX: 845-651-3564

Page 3 of 3

techsupport@cctcable.com

PO BOX 454
FLORIDA, NY 10921