




OSP LOOSE TUBE ALL DIELECTRIC FIBER OPTIC CABLE PRODUCT SPECIFICATIONS 42XXX76EEBSXWN-S

This document establishes the specifications for an outdoor, all dielectric, single mode, dry block fiber optic cable in a loose buffer tube design. It contains test values for all-important mechanical, optical, and environmental parameters and as such, is the basis for all-incoming inspection and acceptance.

1.0 CABLE CROSS SECTION

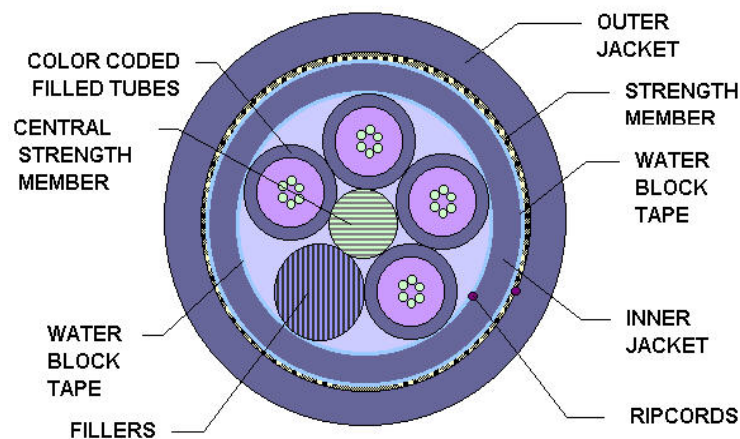

2.0 OVERALL CABLE CONSTRUCTION

2.1 Buffer tube

High Modulus Polymeric material

Dimension: 2.8 mm, nominal for ≥ 6 fibers, 2.2mm, nominal for a 4 fiber cable and 1.98mm, nominal for a 2 fiber cable.

Tube and fiber color code per EIA/TIA-598 or as specified by customer.

Filling compound: A non-toxic and dermatological safe antioxidant hydrocarbon based gel.

2.2 Dielectric Central strength member

Epoxy glass rod with an up-coat of polymer (if necessary per construction).

Water swellable yarns are to be pulled in with the CSM.



2.3 Cable Core

The cable elements are stranded around the CSM, using reverse oscillation.

Moisture Resistance: A water blocking tape is applied over the cable core to prevent water ingress and migration with a nominal of 25% overlap.

Non-wicking binder yarns are applied over the core tape.

2.4 Cable strength

Circumferential strength members are placed over the cable core and under the outer sheath.

2.5 Outer Sheath

UV Resistant Black Polyethylene (or color per customer request).

Nominal jacket wall thickness: 2.54 mm

A ripcord is applied under the outer sheath.

2.6 Cable Markings

Indent printed: CCT GROUP 42, FIBER OPTIC CABLE, # of fibers-SM, TELEPHONE HANDSET SYMBOL (month and year of manufacture), sequentially meter marked. Special print as required by customer.

2.7 Nominal Cable Dimensions & Weights

CCT Part Number	No. of Fibers	No. of Fibers per Tube	Cable OD (mm)	Cable OD (in.)	Weight KG/KM	Weight LB/1000ft
4200676EEBSFWN-S	6	6	13.5	.533	135	90
4201276EEBSLWN-S	12	12	13.5	.533	134	90
4204876EEBSLWN-S	48	12	13.5	.533	137	92
4207276EEBSLWN-S	72	12	14.3	.563	157	105



3.0 FIBER CHARACTERISTICS

Fiber Type	Single mode*
Maximum Attenuation @ 1310/1550nm	0.40/0.30 dB/km
Cladding Diameter	125.0 ± 0.7 μm
Maximum Core/Clad Concentricity Error	0.5 μm
Maximum Cladding Non-circularity	0.7%
Primary Coating Diameter	245 ± 7 μm
Cabled Cutoff Wavelength	<1260nm
Mode Field Diameter	9.0 ± 0.4μm @1310nm 10.1 ± 0.5μm @1550nm
Temperature Dependence	≤0.05dB/km (-60°C to 85°C)
Zero Dispersion Slope	0.090ps/nm ² -km
Maximum PMD Link Design Value	0.06ps/√km
Group Refractive Index @ 1310/1550	1.467 / 1.468
Proof Test	100 kpsi

**According to ITU G.652.d*

4.0 MECHANICAL & ENVIRONMENTAL PERFORMANCE

Maximum Tensile Load for:	Impact Resistance: 25 Impacts (min.)
Installation: 2700N / 607lbf	Flexing, ±90°: 25 Cycles (min.)
Long Term: 890N / 200lbf	Temperature Rating:
Minimum bending radius:	Operation: -40°C to +70°C
Loaded: 20 x diameter	Installation: -40°C to +70°C
Unloaded: 10 x diameter	Storage: -50°C to +70°C
Crush Resistance: 220N/cm	Twist Test: 25 Cycles (min.)

5.0 PREPARATION FOR DELIVERY

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available.

6.0 APPLICABLE DOCUMENTS

Reference Documents:	TIA/EIA FOTP Standards 455
	Color Coding of Fiber Optic Cables TIA/EIA-598
	RUS 1755.900
	GR-20-CORE